

Production Class, Constant Heat Medical Sealer



Standard Features

- 3/8" x 12" Seal Platen
- Validatable
- Simple User Controls
- Foot Pedal Actuation
- External Calibration Ports
- Small Footprint
- Recipe
- Low Maintenance

Optional Features

- Vacuum Seal
- Emboss Coding
- 3-Color Light Tower
- Data Acquisition Via Ethernet
- Custom Pouch Guides

Designed with the user in mind, the APS-12 offers fast, consistent, and reliable pouch sealing in a robust, industrial strength platform.

Simplified pouch sealing is realized with our unique **SENSE AND SEAL™** Technology. Once the pouch is placed in the seal area, its presence is sensed and the seal process is automatically activated. The Status Indicator Lamp alerts the operator when the sealing process starts and ends. This approach to pouch sealing greatly increases productivity while improving operator comfort.

With fewer moving parts and a solid frame design, reliability is achieved. Maintenance cost and down time are greatly reduced with features such as our removable lower platen, and easy access to the seal bar assembly.

The full color touchscreen HMI and the 3-color indicator lamp easily guide the operator through the sealing process.

Accessible calibration ports and an optional Data Acquisition Package help to ensure a fast, straightforward startup.

Vacuum Seal option allows the user to pull vacuum at a pre-defined level before sealing.



3-Color Light Tower option provides an easy & clear view of the Sealer's status condition from a distance.




Specifications

Power Requirements	Electrical: 110 vac 50/60 Hz Pneumatic: 90 - 110 psi clean dry air @ 7.5 SCFM
Cycle Speeds	Up to 30 cycles per minute
Seal Bar Size	Maximum: 12" (305 mm) Long x 0.375" (9.5mm) Wide
Weight	40 lbs

Dimensions

All dimensions are approximate.

Standard Model

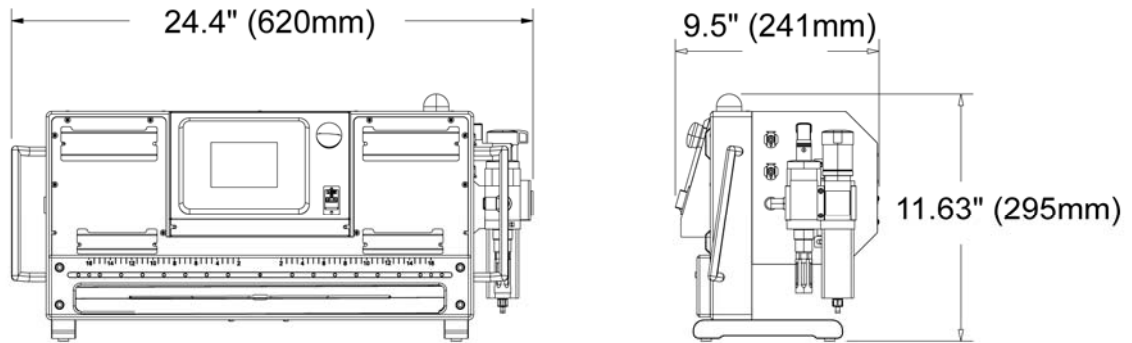

With Options

- 3-Color Light Tower
- Vacuum Seal Module

